


PS SERIES PSMDU48P200-X DC/DC POWER SUPPLY

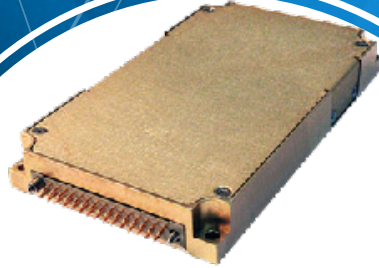

- Miniature
- High density
- Single output
- DC/DC Power supply
- Up to 200 W

Special Features

- Miniature size
- High efficiency
- High Density – up to 32.4 W/in³
- Wide input range
- Input / Output isolation
- Remote sense compensation
- Remote Inhibit (On/Off)
- Parallel connection (Option)
- Output voltage calibration (Option)
- Current limit calibration (Option)
- Fixed switching freq (250 kHz)
- External sync capability
- EMI filters included
- Non-latching protections:
 - Overload
 - Short circuit
 - Output Over Voltage
 - Over Temperature

Electrical Specifications

DC Input

Voltage range: 18 to 48 V_{DC},
IAW MIL-STD-704F

No damage due to overvoltage
transients IAW:

MIL-STD-1275A (100 V for 50 ms)
MIL-STD-704A (80 V for 0.1 s)

Line/Load regulation

Better than ±1% (no load to full
load, –55 °C to +85 °C and over
input voltage range).

Ripple and Noise

Less than 50 mV_{p-p}, typical (max.
1%) without external capacitance.
When connected to system
capacitance ripple drops
significantly.

DC Output

Voltage range: 3.3 to 50 V_{DC}
Current range: 0 to 20 A
Power range: 0 to 200 W

Efficiency

Typical 86-87% - (at 28V full load,
room temperature)

Transient Over-and-undershoot

Output change at load transient of
30%-100% with T_r & T_f of max 30 μs is
5% of output voltage. Output recover
to steady stated within less 0.5 ms.

Isolation

Input to Output: 200 V_{DC}
Input to Case: 200 V_{DC}
Output to Case: 100 V_{DC}

EMC

Designed to meet MIL-STD-461F*
CE101, CE102, CS101, CS114,
CS115, CS116, RE101, RE102,
RS101, RS103

Turn on Transient

No output voltage overshoot
during power on.

* Compliance achieved with 5μH LISN, shielded harness and static resistive load.

Markets & Applications



Military (Airborne, ground-fix, shipboard), Ruggedized



Telecom, Industrial Power Supply

PS SERIES: PSMDU48P200-X

Protections *

Input

- **Under Voltage Lockout**
Turn off below 15 V_{DC}.
Turn on above 16-18 V_{DC}.
UVLO hysteresis is approx. 2-3 V.
- **Over Voltage Lockout**
Turn off above 52-55 V_{DC}.
Turn on below 48-51 V_{DC}.

Output

- **Over Voltage Protection**
Active protection:
Unit shuts down if output voltage rises 10% ± 5% above nominal voltage.
Passive protection:
Transorb selected at approx. 20% above nominal voltage.
- **Current limiting**
Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

General

- **Over Temperature Protection**
Shutdown at base plate temperature of +105 °C ± 5 °C.
Automatic recovery at base plate temperature lower than +95 °C ± 5 °C.

Environmental Conditions

Designed to Meet MIL-STD-810F

Temperature

Methods 501.4 & 502.4
Operating: -55 °C to +85 °C (at baseplate)
Storage: -55 °C to +125 °C (ambient)

Altitude

Method 500.4
Procedures I – Storage/Air transport: up to 70 kft
Procedure II – Operation/Air Carriage: up to 70 kft

Humidity

Method 507.4
Up to 95% RH

Vibration

Method 514.5
Procedure I
Category 24 - General minimum integrity exposure

Shock

Method 516.5
30 g, 11 ms terminal peak saw-tooth

Salt Fog

Method 509.4

Reliability

150,000 hours, calculated IAW MIL-HDBK-217F Notice 2 at +85 °C baseplate, Ground Fix conditions.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

* Thresholds and protections can be modified / removed – please consult factory.

PS SERIES: PSMDU48P200-X

Pin Assignment

Connector: WTB30PR7J –D23 or eq.


Mating connector options (Other options available - consult factory):

- Solder cup sockets: WTAX30SACJT# or eq.
- Removable crimp sockets: WTDXA30SJT# or eq.

Pin No.	Function	
1	INPUT	●
2	INPUT	●
3	INPUT RTN	●
4	INPUT RTN	●
5	PAR IN	
6	PAR OUT	
7	CRNT LMT CAL	
8	SYNC OUT	
9	OUTPUT	●
10	OUTPUT	●

Pin No.	Function	
11	OUTPUT	●
12	OUTPUT RTN	●
13	OUTPUT RTN	●
14	OUTPUT RTN	●
15	SENSE	
16	INPUT	●
17	INPUT	●
18	INPUT RTN	●
19	INPUT RTN	●
20	INHIBIT	●

Pin No.	Function	
21	VLTG CAL	●
22	SIGNAL RTN	●
23	SYNC IN	●
24	OUTPUT	●
25	OUTPUT	●
26	OUTPUT	●
27	OUTPUT RTN	●
28	OUTPUT RTN	●
29	OUTPUT RTN	●
30	SENSE RTN	●



PS SERIES: PSMDU48P200-X

Functions and Signals

INHIBIT signal

The INHIBIT signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)

TTL “0” or short– will turn off the power supply.

SYNC IN signal

The SYNC IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250 kHz \pm 10 kHz.

When not connected the power supply will work at 250 kHz \pm 10 kHz.

SYNC OUT signal

The SYNC OUT signal is a buffered clock used to synchronize other units to the switching frequency of this unit. The signal amplitude is 12V. It is recommended to source and sink up to 1A on this pin.

PAR IN signal

The PAR IN signal is used to connect the power supply in parallel to other power supplies and have them almost equally divide the power between one another. All the power supplies should connect PAR IN signals together except the master unit where the PAR OUT signal connects to all the PAR IN signals.

PAR OUT signal

The PAR OUT signal is used to connect the power supply in parallel to other power supplies and have them almost equally divide the power between one another. The master unit connects the PAR OUT signals to all PAR IN pins of the slave units.

VLTG CAL signal

The VLTG CAL signal is used to control and adjust the output voltage of the power supply by up to \pm 5%. The calibration upwards is performed by connecting a resistor between this pin to SENSE pin.

The calibration downwards is performed by connecting a resistor between this pin to SENSE RTN pin.

Use a 1M Ω potentiometer set to full resistance and slowly decrease resistance until required output voltage reached.

CRNT LMT CAL signal

The CRNT LMT CAL signal is used to adjust the output current limit of the power supply.

SIGNAL RTN

The SIGNAL RTN is referred to the output.

This is used as grounding for all signals.

SENSE


The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load’s terminals).

The use of remote sense has a limit of voltage dropout between converter’s output and load terminals up to 0.5V.

When not used connect + SENSE to +VOUT and –SENSE to –VOUT.

PS SERIES: PSMDU48P200-X


Outline Drawing

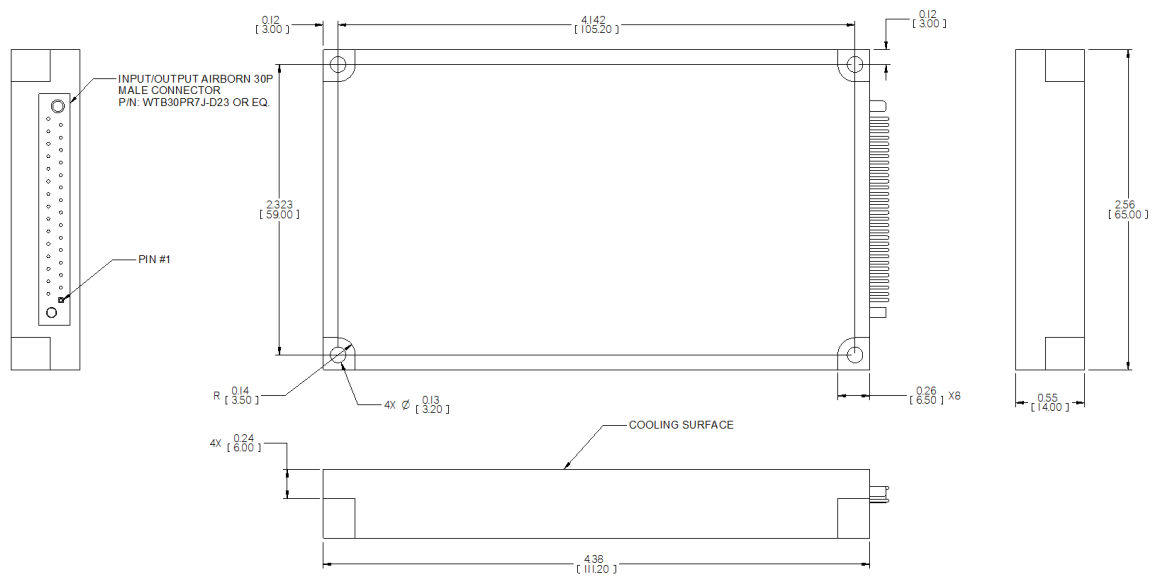

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
.XX ± 0.02 in
.XXX ± 0.008 in
3. Weight: Approx. 6.4 oz [180 g]

Heat Dissipation Surface

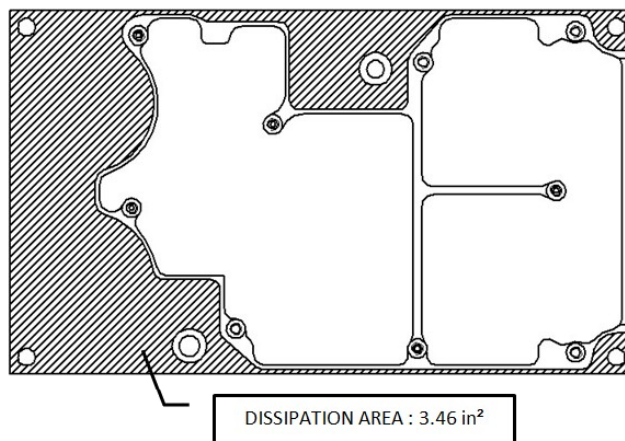

PS SERIES: PSMDU48P200-X

Standard Configurations

Part number	Input voltage range	Output Voltage	Output Current
PSMDU48P200-0	18 to 48 V _{DC}	5 V _{DC}	20 A
PSMDU48P200-1	18 to 48 V _{DC}	12 V _{DC}	16 A
PSMDU48P200-2	18 to 48 V _{DC}	15 V _{DC}	13 A
PSMDU48P200-3	18 to 48 V _{DC}	24 V _{DC}	8 A
PSMDU48P200-4	18 to 48 V _{DC}	28 V _{DC}	7 A
PSMDU48P200-5	18 to 48 V _{DC}	48 V _{DC}	4 A

Note: Specifications are subject to change without prior notice by the manufacturer.

