

PS SERIES PSMASPU265P1K-X Single Phase AC/DC POWER SUPPLY



The PSMASPU265P1K-X is a series of mechanically robust, base plate cooled, high performance, 1kW single output AC to DC power supplies, for Navy shipboard, Airborne, and ground applications. The PSMASPU265P1K-X converts $85 V_{AC} - 265 V_{AC} / 50-60\text{Hz}$ or $85 V_{AC} - 150 V_{AC} / 400\text{Hz}$, to a well-regulated, filtered and protected DC Output.

THE MAIN FEATURES OF THE PSMASPU265P1K-X ARE:

- AC/DC Single output power supply up to 1kW
- $85V_{AC} - 265V_{AC} / 50-60\text{Hz}$ or $85V_{AC} - 150V_{AC} / 400\text{Hz}$ Standard Input version, single-phase
- For extended input version - **Please contact factory for more details**
- High efficiency
- Wide input range
- High power factor
- Input / Output isolation
- Remote sense compensation
- Remote Inhibit (On/Off)
- External sync. capability
- EMI filters included
- Inrush Current Limiter
- Non-latching protections:
 - Overload/Short-circuit
 - Output Overvoltage
 - Over Temperature
 - Input Undervoltage Lockout

Markets & Applications



Military (Airborne, ground-fix, shipboard), Ruggedized



Telecom, Industrial Power Supply

PS SERIES: PSMASPU265P1K-X

Standard Models List (for other voltages – consult factory)

| Part number | Input | | Output | | Special features |
|-----------------|------------------------|-------------|---------------------|---------|--|
| | Voltage range | Frequency | Voltage | Current | |
| PSMASPU265P1K-0 | 85-265VAC/Single phase | 50/60/400Hz | 5 V _{DC} | 70 A | |
| PSMASPU265P1K-1 | 85-265VAC/Single phase | 50/60/400Hz | 12 V _{DC} | 70 A | |
| PSMASPU265P1K-2 | 85-265VAC/Single phase | 50/60/400Hz | 24 V _{DC} | 42 A | |
| PSMASPU265P1K-3 | 85-265VAC/Single phase | 50/60/400Hz | 28 V _{DC} | 36 A | |
| PSMASPU265P1K-4 | 85-265VAC/Single phase | 50/60/400Hz | 48 V _{DC} | 21 A | |
| PSMASPU265P1K-5 | 85-265VAC/Single phase | 50/60/400Hz | 270 V _{DC} | 4 A | |
| PSMASPU265P1K-6 | 85-265VAC/Single phase | 50/60/400Hz | 28 V _{DC} | 36 A | Parallel operation via output voltage droop. Voltage regulation is ±2%.. |
| PSMASPU265P1K-7 | 85-265VAC/Single phase | 50/60/400Hz | 48 V _{DC} | 21 A | Parallel operation via output voltage droop. Voltage regulation is ±2%.. |

- Additional standard configurations available. **Contact factory for more details.**
- All of our products can be configured to comply with EU REACH regulations. **Contact factory for more details.**

SPECIFICATIONS:

| | | |
|------------------------------|--|---|
| AC Input | <i>Voltage Range</i> | Option 1: 85 V _{AC} -265 V _{AC} /50 Hz - 60 Hz / Single-phase Option 2: 85 V _{AC} -150 V _{AC} /400 Hz / Single-phase For extended input version - Please contact factory for more details |
| | <i>Isolation</i> | 1 000 V _{DC} Input to Output 1 000 V _{DC} Input and Case |
| | <i>Spikes</i> | Optional to withstand 1000 V spikes IAW MIL-STD-1399-300B. please consult factory |
| DC Output | <i>Rating</i> | See table on page 8 |
| | <i>Voltage Regulation</i> | Up to ±1% (no load to full load, -40 °C to +85 °C and over normal input voltage range). |
| | <i>Remote Sense</i> | The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load's terminals). For output voltage above 8V, the use of remote sense has a max limit of 0.25V voltage dropout between converter's output and load terminals. For output voltage below 8V, the use of remote sense has a max limit of 0.5V voltage dropout between converter's output and load terminals. When not used connect SENSE to OUT and SENSE RTN to OUT RTN. |
| | <i>Ripple and Noise</i> | (max. 1%) measured at load across 1 μF and 0.1 μF ceramic capacitors. |
| | <i>Isolation</i> | 200 V _{DC} Output and Case |
| | <i>Current Limit & Overload</i> | Output turns off and on periodically (hiccup) until fault is condition removed. Protection threshold set at 120% ± 10% of maximum current |
| | <i>Efficiency</i> | Up to 85-87% - typical (nominal input voltage, full load, room temperature) |
| | <i>Overvoltage Protection</i> | Active Over-Voltage Protection Internal control shuts output down if voltage exceeds 110% ± 5% of nominal. Passive Over-Voltage Protection A transorb, rated to 120% ± 10% of nominal voltage, is placed across the output |
| <i>Over Temp. Protection</i> | Unit shuts down if baseplate temperature exceeds 105 ± 5 °C. Automatic recovery upon cooldown to below 95 ± 5 °C. | |

Specifications (Cont.):


| | | |
|--|---------------------|--|
| Control & Indication | <i>ON/OFF input</i> | <p>The INHIBIT IN signal is used to turn the power supply ON and OFF.</p> <p>TTL "1" or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)</p> <p>TTL "0" – will turn off the power supply.</p> <p>Ground reference for the INHIBIT IN signal is SIGNAL RTN (pin #1).</p> <p>Optional on/off ENABLE IN signal - Please consult factory:</p> <p>TTL "0" or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)</p> <p>TTL "1" – will turn off the power supply.</p> <p>Ground reference for the ENABLE IN signal is SIGNAL RTN (pin #1).</p> |
| | <i>INHIBIT OUT</i> | <p>Used when connecting two units or more in parallel.</p> <p>Connect this signal to the INHIBIT IN pin of the slave unit (see diagram below). This signal synchronizes the shutdown and startup of the units.</p> |
| | <i>SYNC IN</i> | <p>The SYNC IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250 kHz ± 10 kHz.</p> <p>When not connected the power supply will work at 250 kHz ± 10 kHz.</p> |
| | <i>SYNC OUT</i> | <p>The SYNC OUT signal is used to sync the system with the power supply frequency.</p> |
| | <i>SIGNAL RTN</i> | <p>The SIGNAL RTN is a floated ground.</p> <p>This pin is used as ground return for SYNC IN, SYNC OUT, INHIBIT IN and INHIBIT OUT signals.</p> |
| Environment Designed to meet MIL-STD-810F | <i>Temperature</i> | <p>Methods 501.4 & 502.4</p> <p>Operating: -40 °C to +85 °C (at baseplate)</p> <p>Storage: -55 °C to +125 °C (ambient)</p> |
| | <i>Humidity</i> | <p>Method 507.4</p> <p>Procedure I</p> <p>Up to 95% RH</p> |
| | <i>Salt-fog</i> | <p>Method 509.5</p> |
| | <i>Altitude</i> | <p>Method 500.4</p> <p>Procedures I – up to 70,000 ft. (non-operational)</p> <p>Procedure II – up to 40,000 ft. (operational)</p> |

PS SERIES: PSMASPU265P1K-X


| | | |
|--------------------|--|---|
| | <i>Mechanical Shock</i> | Method 516.5 Procedure I 30 g, 11 ms terminal peak saw-tooth |
| | <i>Vibration</i> | Method 514.5 Procedure I Category 24 - General minimum integrity exposure |
| | <i>Fungus</i> | Does not support fungus growth, in accordance with the guidelines of MIL-STD-454, Requirement 4 |
| EMI | <i>MIL-STD-461F</i> | Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RS101, RS103 |
| Reliability | 150,000 hours, calculated per MIL-STD-217F Notice 2 at +85 °C baseplate, Ground Fixed environment. | |
| Form factor | 5.51" wide, 1.50" high and 9.84" deep. For detailed dimensions and tolerances | |
| Weight | 1.92kg (4.25lbr) | |
| Connectors | See Page 9-11 | |

*Compliance achieved with shielded harness and static resistive load.

TYPICAL STAND-ALONE CONNECTION DIAGRAM

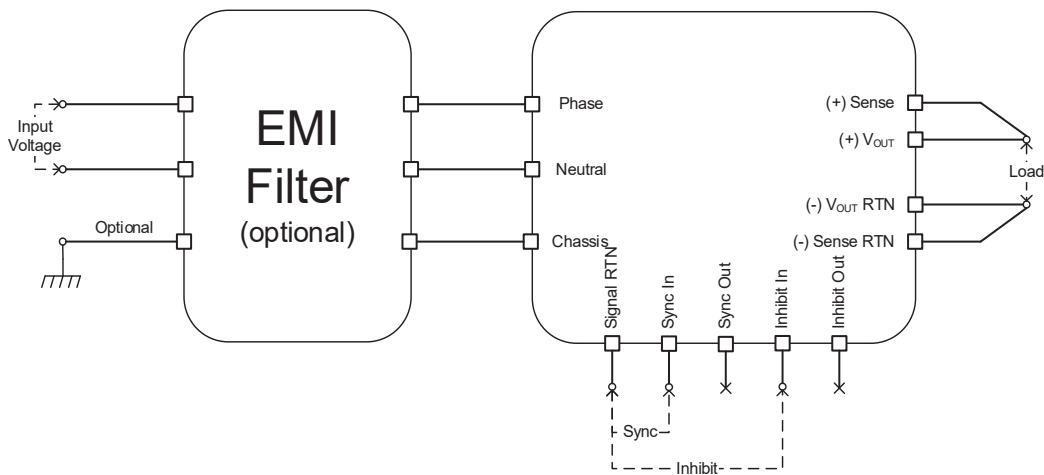

TYPICAL PARALLEL CONNECTION DIAGRAM

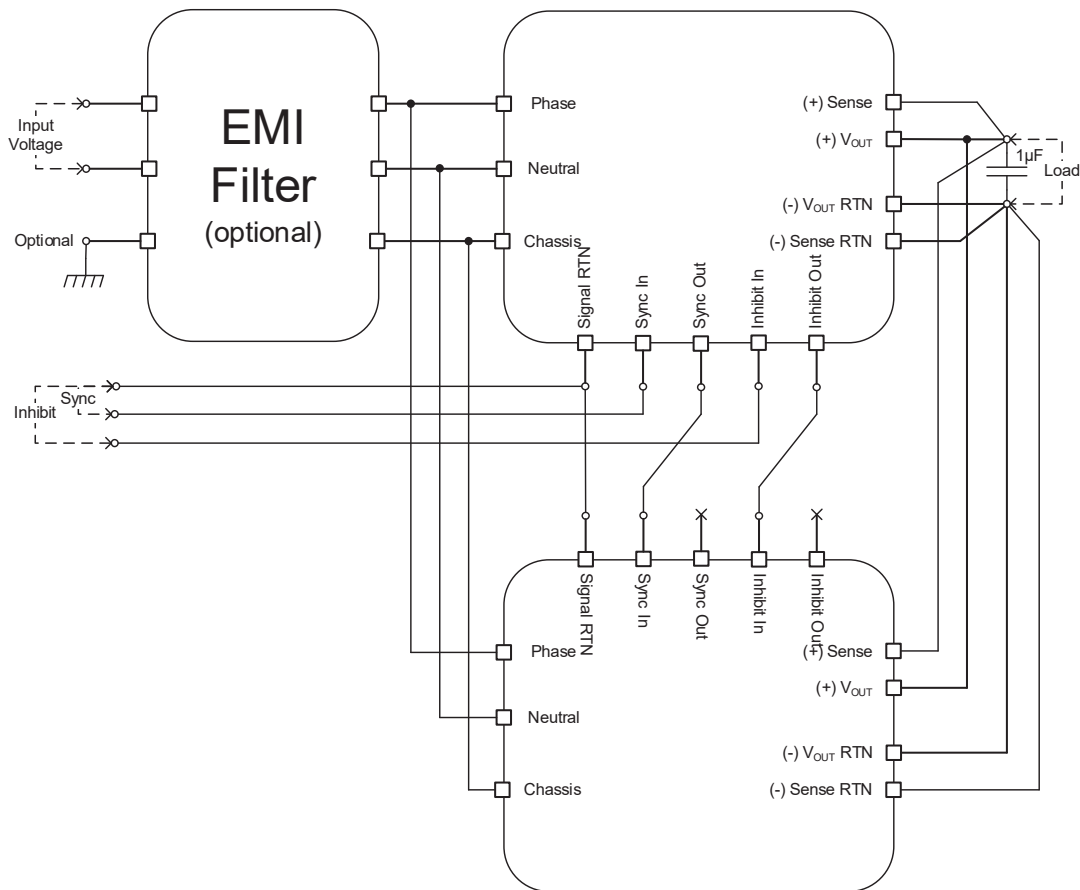

PIN ASSIGNMENT: J1 - INPUT CONNECTOR

Connector type: M24308/24-38F or eq.

Mates with: M24308/2-2F or eq.

| Pin # | Function | P | Pin # | Function | P | Pin # | Function | P |
|-------|----------|---|-------|----------|---|-------|----------|---|
| 1 | PHASE | ~ | 6 | NEUTRAL | 0 | 11 | N.C. | |
| 2 | PHASE | ~ | 7 | N.C. | | 12 | NEUTRAL | 0 |
| 3 | PHASE | ~ | 8 | CHASSIS | | 13 | NEUTRAL | 0 |
| 4 | N.C. | | 9 | PHASE | ~ | 14 | NEUTRAL | 0 |
| 5 | NEUTRAL | 0 | 10 | PHASE | ~ | 15 | N.C. | |

Note: All pins with identical function/designation should be connected together for optimal performance.

CHASSIS Note: Chassis PIN

This pin is connected to the converter's chassis.

PIN ASSIGNMENT: J2 - OUTPUT CONNECTOR


Connector type: M24308/23-41F or eq.

Mates with: M24308/4-5F or eq.

| Pin # | Function | P |
|-------|------------|---|
| 1 | SIGNAL RTN | - |
| 2 | SYNC OUT | + |
| 3 | SENSE | + |
| 4 | OUT | + |
| 5 | OUT | + |
| 6 | OUT | + |
| 7 | OUT | + |
| 8 | OUT | + |
| 9 | OUT | + |
| 10 | OUT | + |
| 11 | OUT RTN | - |
| 12 | OUT RTN | - |
| 13 | OUT RTN | - |
| 14 | OUT RTN | - |
| 15 | OUT RTN | - |
| 16 | OUT RTN | - |
| 17 | OUT RTN | - |

| Pin # | Function | P |
|-------|-------------|---|
| 18 | INHIBIT OUT | + |
| 19 | SENSE RTN | - |
| 20 | OUT | + |
| 21 | OUT | + |
| 22 | OUT | + |
| 23 | OUT | + |
| 24 | OUT | + |
| 25 | OUT | + |
| 26 | OUT | + |
| 27 | OUT RTN | - |
| 28 | OUT RTN | - |
| 29 | OUT RTN | - |
| 30 | OUT RTN | - |
| 31 | OUT RTN | - |
| 32 | OUT RTN | - |
| 33 | OUT RTN | - |
| 34 | SYNC IN | + |

| Pin # | Function | P |
|-------|------------|---|
| 35 | INHIBIT IN | + |
| 36 | N.C. | |
| 37 | OUT | + |
| 38 | OUT | + |
| 39 | OUT | + |
| 40 | OUT | + |
| 41 | OUT | + |
| 42 | OUT | + |
| 43 | OUT | + |
| 44 | OUT RTN | - |
| 45 | OUT RTN | - |
| 46 | OUT RTN | - |
| 47 | OUT RTN | - |
| 48 | OUT RTN | - |
| 49 | OUT RTN | - |
| 50 | OUT RTN | - |
| | | |

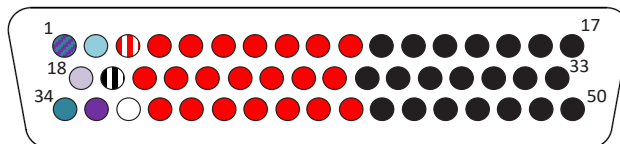

Note: All pins with identical function/designation should be connected together for optimal performance.


CHASSIS Note: Chassis PIN

This pin is connected to the converter's chassis.

PS SERIES: PSMASPU265P1K-X

HV option: High voltage version (100 to 300 VDC)

| Pin # | Function | P | Pin # | Function | P | Pin # | Function | P |
|-------|------------|---|-------|-------------|---|-------|------------|---|
| 1 | SIGNAL RTN | - | 18 | INHIBIT OUT | + | 35 | INHIBIT IN | + |
| 2 | SYNC OUT | + | 19 | N.C. | - | 36 | N.C. | |
| 3 | N.C. | + | 20 | OUT | + | 37 | OUT | + |
| 4 | OUT | + | 21 | OUT | + | 38 | OUT | + |
| 5 | OUT | + | 22 | OUT | + | 39 | OUT | + |
| 6 | OUT | + | 23 | OUT | + | 40 | OUT | + |
| 7 | OUT | + | 24 | OUT | + | 41 | OUT | + |
| 8 | OUT | + | 25 | OUT | + | 42 | OUT | + |
| 9 | OUT | + | 26 | OUT | + | 43 | OUT | + |
| 10 | OUT | + | 27 | OUT RTN | - | 44 | OUT RTN | - |
| 11 | OUT RTN | - | 28 | OUT RTN | - | 45 | OUT RTN | - |
| 12 | OUT RTN | - | 29 | OUT RTN | - | 46 | OUT RTN | - |
| 13 | OUT RTN | - | 30 | OUT RTN | - | 47 | OUT RTN | - |
| 14 | OUT RTN | - | 31 | OUT RTN | - | 48 | OUT RTN | - |
| 15 | OUT RTN | - | 32 | OUT RTN | - | 49 | OUT RTN | - |
| 16 | OUT RTN | - | 33 | OUT RTN | - | 50 | OUT RTN | - |
| 17 | OUT RTN | - | 34 | SYNC IN | + | | | |

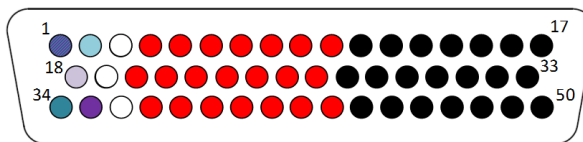

Note: All pins with identical function/designation should be connected together for optimal performance.


CHASSIS Note: Chassis PIN

This pin is connected to the converter's chassis.


PS SERIES: PSMASPU265P1K-X

OUTLINE DRAWING:

For detailed dimensions and tolerances see Drawing: M169001

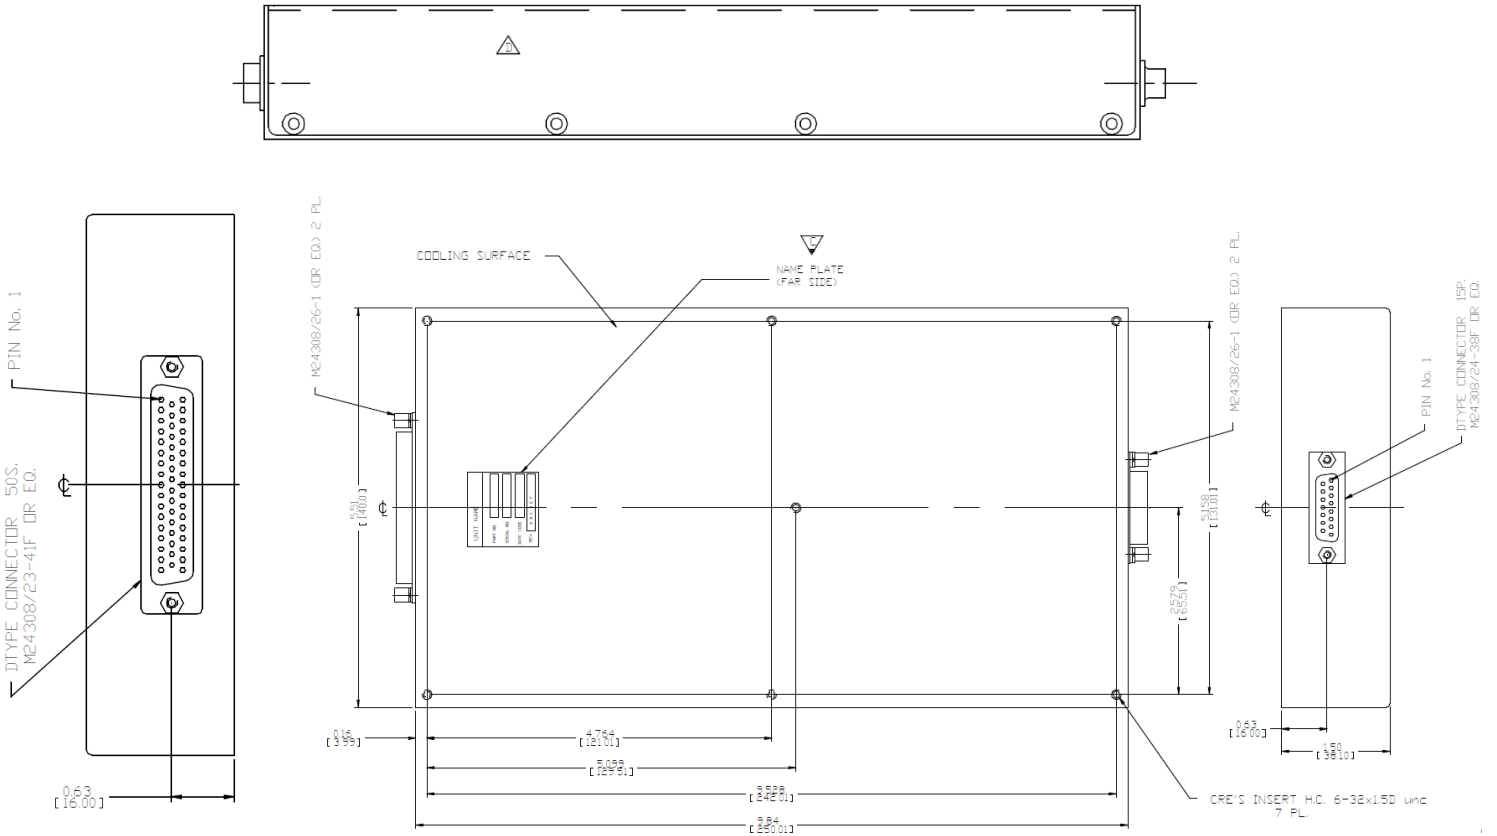

HEAT DISSIPATION SURFACE:

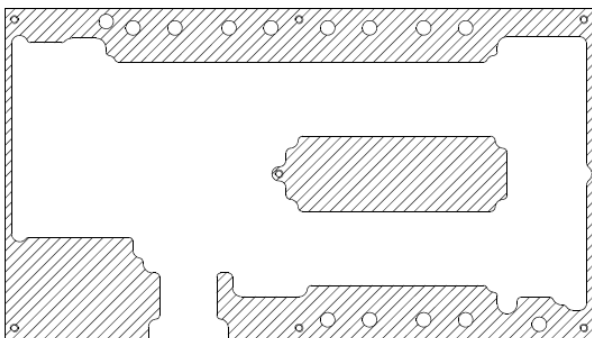

Dissipation Area
21.08 in²
(13,600 mm²)

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
.XX ± .02 in
.XXX ± .01 in
3. Weight: 4.25 lbs [1922 g]

Note: Specifications are subject to change without prior notice by the manufacturer.

